

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**28.08.2002 Bulletin 2002/35**

(51) Int Cl.<sup>7</sup>: **A24D 1/02**

(21) Application number: **01304017.5**

(22) Date of filing: **02.05.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
 Designated Extension States:  
**AL LT LV MK RO SI**

- Jessup, Terry D.  
 Jamestown, North Carolina 27282 (US)
- Williams, David L.  
 Greensboro, North Carolina 27410 (US)
- Zawadzki, Michael A.  
 Greensboro, North Carolina 27409 (US)
- Ihrig, Arthur M.  
 Greensboro, North Carolina 27407 (US)

(30) Priority: **26.02.2001 US 795054**

(71) Applicant: **Lorillard Licensing Company, Llc**  
**Greensboro, North Carolina 27402 (US)**


(74) Representative: **Warren, Anthony Robert et al**  
**BARON & WARREN,**  
**18 South End,**  
**Kensington**  
**London W8 5BU (GB)**

(72) Inventors:  
 • Grider, David A.  
**Greensboro, North Carolina 27405 (US)**

(54) **A reduced ignition propensity smoking article**

(57) A smoking article having reduced ignition propensity is disclosed. The smoking article (10) includes a tobacco column (12), a wrapper (14) surrounding the tobacco column and a filter element (16). The wrapper has a base permeability, and untreated areas (20) alternating with discrete areas (22) treated with a composition to reducing the base permeability. The discretely treated areas (22) interact with a coal of a burning tobacco

firecone as it advances to self-extinguish the smoking article. The composition of the treated areas includes a permeability reducing substance, a burn rate retarding substance and a burn rate accelerating substance. Either the burn rate retarding substance or the burn rate accelerating substance acts as an organoleptic enhancing substance. In this way a smoker's experience when smoking either the treated areas or the untreated areas is substantially the same.

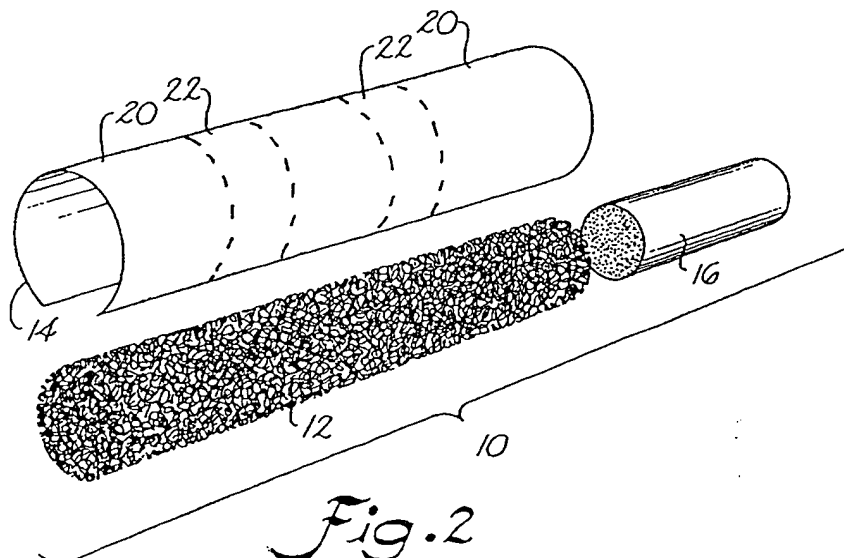

## Description

[0001] The present invention relates generally to a wrapper for a smoking article to create a reduced ignition propensity (IP) smoking article and, more particularly, to a smoking article having the ability to freeburn in a static state and reduced IP. Under some circumstances cigarettes may ignite fire-prone substrates if the article is laid or accidentally contacts the substrate. Therefore, a cigarette prepared from a wrapper, which diminishes the ability of the article to ignite a substrate, may have the desirable effect of reducing cigarette-initiated fires. Furthermore, a wrapper that concurrently confers on the cigarette the ability to freeburn in a static state and reduced IP character allows a beneficial reduction in the tendency of the article to ignite fire-prone substrates while maintaining consumer acceptability.

[0002] There have been various attempts to create a cigarette that has reduced IP and consumer acceptable attributes particularly taste and the ability to freeburn in the static state. Technologies that appear to provide such cigarettes are described in the patent literature. Cigarettes claiming to possess reduced IP are commercially available.

[0003] A factor that manufacturers consider in preparing a smoking article having reduced IP is whether currently used processes and equipment will remain substantially unchanged. One method for preparing a reduced IP paper involves the addition of elaborate equipment on a conventional papermaking machine. Cellulose fibers or particles suspended in water are sprayed from angular moving nozzles moving at an angle to a continuous forming moist web. This approach involves the coordinated angular movement of the spray nozzle and the about 400 feet per minute moving web to create spaced apart bands transverse to the web. The above-mentioned technology suffers from a number of deficiencies that limit consumer acceptability, IP reduction, and ease of manufacture. The technology requires expensive add-on equipment including a spray nozzle system and an associated slurry distribution system, pressure regulating system, and a means for carefully synchronizing the angular material distribution system with the underlying papermaking machine.

[0004] The reduced consumer acceptable properties of the prepared cigarettes are due to factors including reduced ability of the cigarette to freeburn in the static state, poor ash appearance, and variable taste profile.

[0005] The poor IP reduction performance achieved by cigarettes prepared with wrappers made using this technology is believed to be caused by a number of factors including difficulty in depositing an even layer of the cellulose fibers or particles, low efficiency of the cellulose fibers or particles to reduce the permeability of the underlying web, and poor reproducibility caused by fanning out of the sprayed material. Deficiencies in the approach that limit ease of manufacture include the difficulty in synchronizing the angular moving cellulose fibers and particles distribution apparatus with the underlying web forming apparatus and difficulty in reducing the banded moist web to dryness without disrupting the structure of the web.

[0006] Another technology involves adding discrete material regions to the dry web using organic solvent-based printing equipment. Organic solvents and non-aqueous soluble solutes are used to make the discrete regions on the web. The presence of organic solvents requires hoods to capture the solvent vapors and the corresponding further expenses.

[0007] In regard to commercially available cigarettes claiming to possess reduced IP, consumers may find their organoleptic experience wanting. Some technologies that are based on discretely treated areas for reduced IP cigarettes create a varying organoleptic experience as the consumption of the smoking article moves from treated area to non-treated areas.

[0008] One commercial product claiming to possess reduced IP is characterized by a tendency to extinguish when left burning in the static state – that is reduced freeburn. The article displays a less desirable taste when relit after being extinguished. Thus, although the cigarette may possess the reduced IP, the reduced freeburn property decreases consumer acceptability of the article.

[0009] Other factors affecting consumer acceptability are product appearance, including pleasing and consistent wrapper and ash character. Moreover, it is important that the construction of the smoking article exhibit a reasonable shelf-life while maintaining reduced IP.

[0010] Thus, there remains a need for a new and improved wrapper and smoking article having reduced IP while at the same time possessing a sufficient free burn. Also, there remains a need for a new and improved method for making a wrapper that can be used to create a smoking article having reduced IP and sufficient freeburn.

[0011] The present invention is directed to a smoking article having reduced IP. The smoking article includes a tobacco column, a wrapper surrounding the tobacco column and, optionally, a filter element. The wrapper has a base permeability, an untreated area and a least one discrete area treated with a composition to reduce the base permeability. The discretely treated area interacts with a coal of a burning tobacco firecone as it advances to self-extinguish the smoking article if the smoking article is left on a surface or causes the cigarette not to ignite the surface.

[0012] The tendency of a cigarette to self-extinguish or not ignite surfaces can be measured by the use of IP tests such as those published by the Consumer Products Safety Commission and developed by the National Institute of Standards and Technology (NIST) or the American Society of Testing and Materials (ASTM). See Ohlemiller, T.J. et al., "Test Methods for Quantifying the Propensity of Cigarettes to Ignite Soft Furnishings. Volume 2, " NIST SP 851;

volume 2; 166 pages [also includes: Cigarette Extinction Test Method, see pp. 153-160] August 1993 available from U.S. Consumer Product Safety Commission, Washington, DC 20207 as order number PB94-108644, the subject matter of which is herein incorporated by reference. One NIST IP test, the "cotton duck test", involves placing a smoldering cigarette on a test assembly composed of a cellulosic fabric over a foam block. Variations of the test use fabrics of various weights and polyethylene sheet backing. A test failure occurs when the fabric ignites. Another NIST IP test, the "filter paper test", involves placing a smoldering cigarette on a test assembly composed of layered filter paper sheets. Various forms of the test use 3, 10, and 15 layered filter paper sheets. A successful test result occurs when the cigarette self extinguishes before the whole tobacco column is consumed.

[0013] The composition of the treated area includes at least a permeability reducing substance. Another substance in the treated area includes a burn rate retarding substance. Yet another substance in the treated area includes a burn rate accelerating substance. Either the burn rate retarding substance or the burn rate accelerating substance or both preferably acts as an organoleptic enhancing substance. In this way a smoker's experience when smoking either the at least one treated area or the untreated area is substantially the same. Additionally, the composition of the treated area may include a filler component.

[0014] In a wrapper making process, the applied amount of the permeability reducing substance, the burn rate retarding substance, and the burn rate accelerating substance is such as to give the desired freeburn character and IP reduction to a finished article made from the wrapper. The quantity and the concentration of the applied composition will depend on factors including the absorbency of the web, polymer properties of the permeability reducing substance, whether the web is wet or dry, and the operating conditions of the application equipment.

[0015] The burn rate accelerating substance may be an alkali metal or alkali earth containing salt. Preferably, the burn rate accelerating substance may be an alkali metal salt of a carboxylic acid such as acetic acid, citric acid, malic acid, lactic acid, tartaric acid and the like. Preferably, the salt of the carboxylic acid is a salt of citric acid. Also, the alkali metal containing compound is preferably at least one of a sodium containing compound and a potassium containing compound. Alternatively, the burn rate accelerating substance may be monoammonium phosphate.

[0016] The burn rate retarding substance may be a phosphate, preferably a phosphate of ammonium and more preferably a diammonium phosphate.

[0017] The permeability reducing substance may be a pore filling substance, a film forming substance or combination thereof. The permeability reducing substance may be a polymer and, preferably, a polysaccharide. Among the contemplated polysaccharides are starch, including various mixtures of amylose, amylopectin and dextrin, modified starch and starch derivatives. The starch and starch derivatives may be water dispersible and, preferably, water soluble. Other contemplated polysaccharides include cellulose, cellulose derivatives, chitosan, chitosan derivatives, chitin, chitin derivatives, alginate, alginate derivatives and combinations thereof. These polysaccharides are preferably water dispersible and, more preferably, are water-soluble.

[0018] In one embodiment, the discretely treated area is a circumferential band about the body of the article. The band has a sufficient width so as to deprive the coal of the burning tobacco firecone of oxygen from behind a char line of the wrapper when the smoking article is placed on a surface. That may be achieved by a band width typically of at least about 3 millimeters.

[0019] In an alternative embodiment, the discretely treated area includes at least two bands spaced sufficiently to reduce the IP of the smoking article. In this case, the two bands preferably have a center-to-center spacing of between about 10 millimeters to about 30 millimeters. The two bands may have a width of about 3 millimeters to about 10 millimeters. A center-to-center spacing is preferably about 25 millimeters.

[0020] The discretely treated area preferably has a thickness and properties so a bobbin of the wrapper is useable in a commercially available smoking article manufacturing machine. Also, the discretely treated area is preferably visually substantially the same as the untreated area.

[0021] Still another aspect of the present invention is to provide a population of smoking articles having a reduced IP. Each smoking article within the population includes a tobacco column, wrapper surrounding the tobacco column so that the smoking article includes an ignition end and a distal end, and at least one banded region, preferably at least two spaced apart banded regions, between the ignition end and the distal end having a combustion characteristic substantially different from that of a non-banded, untreated, region. A distance from the ignition end to the at least one of the banded region of each smoking article may be sequentially related, random, or quasi-random within a selected population.

[0022] In one embodiment, the selected population is a package of smoking articles and in another embodiment a grab sample of smoking articles.

[0023] In another embodiment, the distance from the ignition end to the at least one of the banded regions of each smoking article are sequentially related, random, or quasi-random.

[0024] In a preferred embodiment, the IP of the selected population is between about 50 and about 100 percent for the population.

[0025] The invention also provides a method of making a wrapper, of making a smoking article having reduced IP,

and a composition for application to a paper to make a wrapper and a smoking article.

**[0026]** The invention will be better understood after a reading of the following description of the preferred embodiment when considered with the drawings in which:

- 5       FIGURE 1 is a perspective view of a smoking article according an embodiment of the present invention;  
       FIGURE 2 is an exploded view of the smoking article of Figure 1;  
       FIGURE 3 is a perspective view of a bobbin of wrapper that may be used to make the smoking article of Figure 1;  
       FIGURE 4 is a plan view of a wrapper as might be accumulated in a bobbin as shown in Figure 3;  
 10       FIGURE 5A is a schematic of a population of smoking articles having a substantially random distance from the  
       ignition end to the at least one of the banded region of each smoking article within the population according an  
       embodiment of the present invention;  
       FIGURE 5B is a schematic of a population of smoking articles having a quasi random distance from the ignition  
       end to the at least one of the banded region of each smoking article within the population according an embodiment  
       of the present invention;  
 15       FIGURE 5C is a schematic of a population of smoking articles having a sequentially related distance from the  
       ignition end to the at least one of the banded region of each smoking article within the population according an  
       embodiment of the present invention; and  
       FIGURE 6 is a schematic of a package of smoking articles of any of Figure 1, Figure 5A, Figure 5B and Figure 5C.

20       **[0027]** Referring now to the drawings in general and Figure 1 in particular, it will be understood that the illustrations are for the purpose of describing a preferred embodiment of the invention and are not intended to limit the invention thereto. As best seen in Figure 1, a smoking article 10 includes a tobacco column 12 surrounded by a wrapper 14. The smoking article 10 may, as an option, include a filter element 16 adjacent to the tobacco column 12 surrounded by the wrapper 14.

25       **[0028]** Figure 2 shows an exploded view of the smoking article 10 of Figure 1 including certain aspects relating to the wrapper 14, which is a modified cigarette paper. In particular, wrapper 14 includes untreated areas 20 alternating with treated areas 22. Treated areas 22 include a combination of substances that interact with the wrapper 14 to create the reduced IP smoking article 10. At least one of the substances in treated area 22 includes a permeability reducing substance. Another substance in treated area 22 includes a burn rate retarding substance. Yet another substance in  
 30       treated area 22 includes a burn rate accelerating substance. Optionally, another substance in the treated area includes filler. These substances interact with each other and the wrapper paper 14 to create a wrapper that may be used to manufacture reduced IP smoking article 10.

**[0029]** The permeability reducing substance may be a polymer. The polymer may be any one of a natural polymer, a derivative of a natural polymer, a synthetic polymer, and a combination of any of the preceding. Applicants have  
 35       found that polysaccharides are suitable as permeability reducing substances. The polysaccharides may be at least one of a starch, modified starch, starch derivative, cellulose, cellulose derivative, chitosan, chitosan derivative, chitin, chitin derivative, alginate, alginate derivative or a combination of any of the preceding. Any polysaccharide that suitably reduces the permeability of the wrapper would be appropriate for use as the permeability reducing substance.

**[0030]** Applicants believe that starch, modified starch, starch derivatives, cellulose and cellulose derivatives would  
 40       act particularly well as permeability reducing substances. Applicants have found that starch and starch derivatives work particularly well as the permeability reducing substance. Water soluble and water dispersible starch, starch derivatives, cellulose and cellulose derivatives would be more desirable than nonaqueous solvents and dispersants. Nonaqueous solvents may be harmful to workers, or environmentally regulated so that exhaust equipment that may be needed to capture organic solvent mists and vapors.

45       **[0031]** Without wishing to be bound by any scientific theory and explanation, applicants believe that a permeability reducing substance may interact with the wrapper in a number of ways. In one, a permeability reducing substance may form a film on the wrapper 14 to reduce permeability by blocking pores in the wrapper 14. That is, when the permeability reducing substance is applied to the wrapper 14, a film is created that acts as a barrier to block the movement of gas through pores in the discretely treated area 22.

50       **[0032]** Alternatively, a permeability reducing substance may act to fill pores and thereby reduce the porosity of the wrapper 14. In this way, a discretely treated area 22 possesses porosity or gas permeability less than that of the untreated area 20 of the wrapper 14.

**[0033]** As a further alternative, a permeability reducing substance may both form a film on the wrapper 14 and act  
 55       to fill pores in the wrapper 14 so that a discretely treated area 22 possesses a porosity or gas permeability less than that of the untreated area 20 of the wrapper 14.

**[0034]** Applicants have determined that the permeability in the discretely treated area 22 of wrapper 14 may be less than about 10 CU (CORESTA units,  $\text{cm}^3/\text{min}/\text{cm}^2$  at 1 kPa measuring pressure as substantially measured according to CORESTA [Cooperative Centre for Scientific Research Relative to Tobacco, Paris, France] Recommended Method

N° 40: Determination of Air Permeability of Materials Used as Cigarette Paper, Filter Plug Wrap and Filter Joining Paper including Materials Having an Oriented Permeable Zone, October 1994, published in Bulletin 1994-3/4, the subject matter of which is incorporated herein by reference) and is preferably less than about 7 CU. Alternatively, the band area, and optionally untreated area, may contain a perforation zone produced by methods such as electrostatic and mechanical perforation and the like that are known to those skilled in the art. Applicants have discovered the unexpected property that a banded area, possessing a perforation zone, may exhibit a relatively high apparent permeability while still conferring a reduced IP character on an article made from the thus treated paper. In a preferred embodiment the permeability of a perforated band may be less than about 60 CU.

[0035] A burn rate retarding substance includes any substance that reduces the smolder rate of materials such as paper, cloth and plastic, and may also increase their resistance to flaming combustion. Phosphates have been found to work well and, in particular, phosphates of ammonium. A particular preferred phosphate of ammonium is the diammonium phosphate (having synonyms such as diammonium hydrogenphosphate; DAP; diammonium hydrogenorthophosphate; phosphoric acid, diammonium salt; and ammonium hydrogen phosphate).

[0036] A burn rate retarding substance may have additional beneficial benefits including unexpected improved organoleptic properties discovered by applicants. To that end, applicants have found that consumers detect a more pleasing smoke taste when the burn rate retarding substance is present in the discretely treated area 22 in smoking article 10 according to the present invention.

[0037] A burn rate retarding substance also may cooperate with a permeability reducing substance in another unexpected synergistic manner. That is, the inclusion of a burn rate retarding substance may reduce the amount of a permeability reducing substance that may need to be applied to a discretely treated area 22. This may have an impact on the manufacturability of a wrapper 14 according to the present invention by decreasing the amount of permeability reducing material needed to achieve IP reduction.

[0038] A burn rate accelerating substance includes any substance known to increase the rate at which the smolder process of such materials as paper, cloth and plastic takes place. Such a substance may contribute to the free burn of a smoking article 10 according to the present invention. Preferably, a reduced IP smoking article 10 self-extinguishes when placed onto a surface and continues to burn when the smoking article 10 is freely suspended such as within the holder of an ashtray or held without puffing. This latter attribute is known as "freeburn." To that end, a burn rate accelerating substance interacts with the wrapper 14, the permeability reducing substance, and the burn rate retarding substance to create a discretely treated area 22 that works to maintain the balance between self-extinguishment and freeburn.

[0039] A burn rate accelerating substance may be a salt such as an alkali metal and an alkali earth metal containing salt and, preferably, one containing an alkali metal preferably sodium, potassium and sodium and potassium. The salt may be a salt of a carboxylic acid such as acetic acid, citric acid, malic acid, lactic acid, tartaric acid and the like. In a particularly preferred embodiment, it is a salt of a citric acid. Alternatively, the burn rate accelerating substance may be monoammonium phosphate.

[0040] A burn rate accelerating substance may have additional beneficial benefits including unexpected organoleptic enhancing abilities discovered by applicants. To that end, applicants have found that consumers detect substantially no difference between smoking an untreated area 20 and a discretely treated area 22 in smoking article 10 according to the present invention. This removes the need for difficult to achieve gradations, such as described in U.S. Pat. No. 5,878,753, between a discretely treated area 22 and untreated areas 20 to maintain a substantially consistent organoleptic experience for the consumer.

[0041] A filler substance includes particulate materials such clay, chalk (calcium carbonate), and titanium oxide. Applicants believe that the presence of filler may be beneficial during the manufacture of discretely treated areas 22 by allowing the appearance, particularly the opacity, of discretely treated areas 22 to be carefully controlled so as to be substantially the same as the untreated region 20.

[0042] A manufacturing of discretely treated areas 22 may be made by applying compositions that are applicable to the wrapper 14 when the wrapper 14 might be in a wet or dry state or a semi-wet state. Those skilled in the art will appreciate that the quantity and the concentration of the applied composition will depend on factors including the absorbency of the web, properties of the permeability reducing substance, whether the web is wet or dry, and the operating conditions of the application equipment. Moreover, those skilled in the art will appreciate that the composition may be applied by a number of known methods including spraying, stenciling, flexographic printing, gravure printing, and the like including both multiple-pass and single-pass processes.

[0043] Preferably, the composition for affecting the discretely treated areas may be applied on one side of the base paper such that the formed band 22 faces the tobacco-side 12 after making article 10 from the banded paper. Alternatively, the composition may be applied on both sides of the paper or applied such that the formed band 22 faces the outside or consumer-side after making article 10 from the banded paper.

[0044] Manufacturing of reduced IP smoking articles is preferably accomplished using a reel, or bobbin, length of wrapper 14 with discretely treated areas 22 and untreated areas 20. Using a bobbin of banded paper in a cigarette-

making machine will provide a population of banded smoking articles having a reduced IP. That is, each smoking article within the population will include a tobacco column, wrapper surrounding said tobacco column so that the smoking article includes an ignition end and a distal end, and at least one banded region, preferably at least two spaced apart banded regions, between the ignition end and the distal end whereby the distance from the ignition end to the at least one of the banded region of each smoking article may be random (substantially as depicted in Figure 5A), quasi-random (substantially as depicted in Figure 5B), or sequentially related (substantially as depicted in Figure 5C) within the population. The population may any population such as a grab sample and a package of cigarettes as depicted in Figure 6.

[0045] Applicants believe that the sequentially related, random, or quasi-random band position would have the benefit of allowing the cigarette population as a whole to have fewer tendencies to ignite fire-prone substrates. Overall, IP tests incorporate a fixed burn-down distance in which the article is burned before being placed on the test substrate. In real-world ignition scenarios the article may burn down to any distance with respect to the ignition end of the article before contacting a substrate. Therefore, a sequentially related, random, or quasi-random band position will increase the probability that any individual member of the banded article population may prevent ignition of a prone substrate when the article is burned down to a random distance before substrate contact. Alternatively, bands may be registered at a fixed distance with respect to the ignition end of article 10. The preferred embodiment of this invention is for the manufacture of reduced IP articles having a sequentially related, random, or quasi-random band position with respect to the ignition end of article 10.

[0046] The following examples relate to smoking articles produced according to the present invention and are provided to more fully explain the invention. In the examples describing sample cigarette papers made by "gravure printing" the samples were made using a single-pass gravure printing process. Bands on the gravure-printed paper were about 6 mm wide, substantially perpendicular to the paper edge, and applied at about 25 mm intervals center to center. After printing and allowing the applied composition to dry, the treated paper was slit and rolled into bobbin form compatible with a standard cigarette-making machine. The banding composition was printed on one side of the base paper such that band 22 was facing the tobacco-side 12 after making article 10 from the banded paper. Gravure print-banded paper was used to manufacture cigarette using a conventional cigarette-making machine thereby giving a selected population of cigarettes with quasi-random band positions.

[0047] In the examples describing sample cigarettes prepared by "hand banding" a circumferential ring of material was applied around the body of smoking article, by hand, using an aluminum printing plate. The aluminum printing plate was fashioned from a slab of aluminum metal with a straight channel, about 7 millimeters wide and about 30 millimeters long, milled below the surface of the slab. A banding composition was used to fill the channel of the printing plate. The smoking article was then rolled, by hand, across the composition-filled channel such that a circumferential band was formed about the body of the smoking article. Therefore, the about 7 millimeter wide band was printed on one side of the wrapper such that band 22 was on the outside or consumer-side of article 10. Hand banded cigarettes are characterized as having the applied band registered at a fixed position with respect to the ignition end of the article.

[0048] In each of the examples, "freeburn" was measured by igniting a cigarette and placing the smoldering article horizontally in a holder. The article was allowed to statically smolder without the column or ember contacting a surface. A positive freeburn result occurred when the cigarette was consumed to the filter element.

[0049] In each of the examples, a series of conventional flax pulp cigarette papers were used and the properties of these papers are given in Table 1.

Table 1.

Average Base Paper Properties.				
Paper	Permeability (CU)	Filler (%) *	Citrate (%) **	Basis Weight (g/m <sup>2</sup> )
A	18	30	0.85	25.5
B	29	29	0.85	25.5
D	31	28	2.30	26.0
E	32	28	0.60	26.0
F	37	30	0.90	26.0
G	48	28	0.93	25.5
H	71	32	0.70	25.8

\* Weight percent calcium carbonate

\*\* Weight percent citrate salt

[0050] Example 1. Three smoking article types were made using a paper wrapper, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend.

The cigarettes were made on a conventional cigarette-making machine. Two of the smoking article samples were made using separately banded, reduced IP papers. The third smoking article sample served as a control and was made from a standard cigarette paper. For all smoking article samples in this example paper A was used.

[0051] Two banded wrappers were made by applying permeability reducing compositions on base paper A using gravure printing. About 60,000 cigarettes were made for each of a high band weight wrapper type, designated 1-C, a low band weight wrapper type, designated 1-B, and a conventional non-banded wrapper, designated 1-A, as a control. All cigarette types were tested for IP according to the NIST (10-sheet) filter paper IP test and freeburn.

[0052] Cigarette type 1-B was made from cigarette paper A gravure printed with a composition containing about 20.5 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.90 weight percent DAP (Rhodia, Cranbury, NJ), about 8.40 weight percent citrate salt, and about 70.17 weight percent tap water. The citrate salt was a mixture of sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ) and potassium citrate monohydrate (Fisher Scientific, Fair Lawn, NJ) in an about 1:2.8 weight/weight ratio. The composition was heated at approximately 87°C for about 15 minutes. The permeability in the banded region was measured as about 6 CU.

[0053] Cigarette type 1-C was made from cigarette paper A gravure printed with a composition containing about 27.21 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 1.20 weight percent DAP (Rhodia, Cranbury, NJ), about 11.13 weight percent citrate salt, and about 60.46 weight percent tap water. The citrate salt was a mixture of sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ) and potassium citrate monohydrate (Fisher Scientific, Fair Lawn, NJ) in an about 1:2.8 weight/weight ratio. The composition heated at approximately 87°C for about 15 minutes. The permeability in the banded region was measured as about 4 CU.

[0054] During cigarette production, approximately 100 cigarettes were collected after about multiples of about 6,000 cigarettes were produced. The banded, reduced IP, papers ran substantially the same as the non-banded standard cigarette paper. No manufacturing or packing problems were observed.

[0055] Table 2 indicates IP and freeburn results for the control cigarette. The results in Table 3 and Table 4 indicate that the reduced IP prototypes cigarettes were characterized as having significant IP reduction, relative to the control, while maintaining the ability to freeburn in the static state.

[0056] Applicants observed that the manufacturing of cigarettes 1-B and 1-C gave a population of banded cigarettes. The band position of grab samples, collected on the cigarette-making machine immediately after manufacture, were believed to have sequentially related band positions. Overall, the band position relationship between the grab samples and the population as a whole was believed to be quasi-random. The results in Tables 2 and 3 show that the freeburn and IP reduction for the grab samples was similar to the population average.

[0057] The smoke taste profile of cigarettes 1-B and 1-C were substantially the same as control cigarette 1-A in terms of taste when smoking within banded areas and smoking in the untreated, non-banded, areas. The bands on 1-B and 1-C cigarettes were found to be nearly undetectable compared to the non-banded control article 1-A. For the reduced IP articles, 1-B and 1-C, the appearance of the ash after the banded region was smoked through was substantially the same as the ash formed when the untreated, non-banded, region was smoked through. Overall, the ash appearance of the reduced IP cigarettes, 1-B and 1-C was substantially the same as the control article 1-A.

Table 2.

IP and Freeburn Results for Control Cigarette 1-A.			
IP Pass (%) *	Replicates	Freeburn (%)	Replicates
0	8	100	32

\* NIST (10-sheet) filter paper IP test

Table 3.

IP and Freeburn Results for Samples of 1-B Acquired During A Manufacturing Trial.				
Grab Samples *	IP Pass (%) **	Replicates	Freeburn (%)	Replicates
B-1	87.5	8	100	8
B-2	62.5	8	100	8
B-3	75.0	8	100	8
B-4	100	8	100	8

\* Sample number: B-# where # is a multiple of about 6000 cigarettes; for example, B-10 refers to about 100 articles taken after about 60,000 cigarettes were made.

\*\* NIST (10-sheet) filter paper IP test



EP 1 234 514 A2

Table 3. (continued)

IP and Freeburn Results for Samples of 1-B Acquired During A Manufacturing Trial.				
Grab Samples *	IP Pass (%) **	Replicates	Freeburn (%)	Replicates
B-5	87.5	8	100	8
B-6	87.5	8	100	8
B-7	62.5	8	100	8
B-8	87.5	8	100	8
B-9	87.5	8	100	8
B-10	75.0	8	100	8
	Average = 81.3		Average = 100	

\* Sample number: B-# where # is a multiple of about 6000 cigarettes; for example, B-10 refers to about 100 articles taken after about 60,000 cigarettes were made.

\*\* NIST (10-sheet) filter paper IP test

Table 4.

IP and Freeburn Results for Samples of 1-C Acquired During A Manufacturing Trial.				
Grab Samples	IP Pass (%) *	Replicates	Freeburn (%)	Replicates
C-1	100	8	100	8
C-2	87.5	8	87.5	8
C-3	100	8	87.5	8
C-4	75.0	8	100	8
C-5	87.5	8	100	8
C-6	87.5	8	100	8
C-7	100	8	100	8
C-8	100	8	100	8
C-9	100	8	100	8
C-10	100	8	87.5	8
	Average = 93.8		Average = 91.3	

\* Sample number: C-# where # is a multiple of about 6000 cigarettes; for example, C-10 refers to about 100 articles taken after about 60,000 cigarettes were made.

\*\* NIST (10-sheet) filter paper IP test

**[0058] Example 2.** A survey of derivatized starch products was made to determine their suitability for use in preparing a cigarette having reduced IP. RediFilm-54®, RediFilm-250®, and 11527-2 starch compositions were obtained from National Starch (Berkeley, CA) as summarized Table 5.

**[0059]** The various starch compositions were used to make a circumferential band, about 7 millimeters wide, around the body of a smoking article. The circumferential band was positioned about 15 millimeters from the ignition end of the finished smoking article. The smoking article was prepared using cigarette paper A, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend.

Table 5.

Starch Compositions Used.	
Starch Product*	Characterization
RediFilm-54®	- hydrophobic derivatized starch - "low" degree of substitution - water-based composition at 24.66 weight percent solids
RediFilm-250®	- hydrophobic derivatized starch - "high" degree of substitution

\* Supplied by National Starch (Berkeley, CA)

Table 5. (continued)

Starch Compositions Used.	
Starch Product*	Characterization
11527-2	- water-based composition at 23.67 weight percent solids
	- hydrophobic derivatized starch
	- experimental, non-commercial product
	- water-based composition at 9.33 weight percent solids

\* Supplied by National Starch (Berkeley, CA)

**[0060]** A band was applied on the smoking article by hand using an aluminum printing plate, and the wet weight of added material was measured. The applied dry weights of banding materials were calculated and are reported in Table 6.

**[0061]** The NIST (#6) cotton duck IP test was used to determine IP of the banded cigarette samples. For each banded cigarette type, 8 replicates were tested and the results are given in Table 6.

Table 6.

Summary of Banded Cigarette IP Data.		
Starch Product	IP Pass (%) *	Dry band weight (µg)
RediFilm-54®	100	222
	100	113
	100	88
	62.5	44
RediFilm-250®	100	156
	100	88
	12.5	38
	100	94
11527-2	100	94
	12.5	36

\* NIST (#6) cotton duck IP test

**[0062]** The hydrophobic derivatized starches (RediFilm-54®, RediFilm-250®, and 11527-2) gave low visibility bands when applied on the cigarettes. The IP results indicate that derivatized starch products are effective IP reducing materials. In the present application about 90 micrograms (µg) would be the dry weight that forms a substantially about 100% effective, IP reducing, registered position band.

**[0063]** Example 3. Three smoking articles were made using a banded wrapper, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and cigarette tobacco blend. The cigarettes were made on a conventional cigarette-making machine. The smoking articles were made using separate banded cigarette papers.

**[0064]** Cigarette type 3-A was made from cigarette paper A gravure printed with a composition containing about 16.4 weight percent RediFilm-54® starch (National Starch, Berkeley, CA) and about 83.6 weight percent tap water. The permeability in the banded region was measured as about 4 CU.

**[0065]** Cigarette type 3-B was made from cigarette paper A gravure printed with a composition containing about 18.18 weight percent Ethylex-2015® hydroxyethylated starch (A.E. Staley, Decatur, IL), about 1.01 weight percent DAP (Rhodia, Cranbury, NJ), and about 80.81 weight percent tap water. The composition heated at approximately 87°C for about 15 minutes.

**[0066]** Cigarette type 3-C was made from cigarette paper A gravure printed with a composition containing about 18.18 weight percent Ethylex-2065® hydroxyethylated starch (A.E. Staley, Decatur, IL), about 1.01 weight percent DAP (Rhodia, Cranbury, NJ), and about 80.81 weight percent tap water. The composition was heated at approximately 87°C for about 15 minutes.

**[0067]** During cigarette production, approximately 2,000 cigarettes were collected for each type. The cigarettes were collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The derivatized starches (RediFilm-54®, Ethylex-2015®, and Ethylex-2065®) gave low visibility bands when applied on the cigarettes.

[0068] The banded, reduced IP, papers ran substantially the same as non-banded cigarette paper A. No manufacturing problems were observed during cigarette production.

[0069] Table 7 indicates IP and freeburn results for cigarettes 3-A, 3-B, and 3-C. Cigarette IP was measured, using about 20 replicates, by the NIST (10-sheet) filter paper test. The freeburn character was measured using about 16 replicates. The IP results indicate that derivatized starch products are effective IP reducing materials in the present application in which band position is random on the individual articles in the population.

Table 7.

Summary of Banded Cigarette IP and Freeburn Data.			
Cigarette Type	Starch Product	IP Pass (%) *	Freeburn (%)
3-A	RediFilm-54®	100	0.0
3-B	Ethylex-2015®	90	93.8
3-C	Ethylex-2065®	100	0.0

\* NIST (10-sheet) filter paper IP test

[0070] Example 4. A series of cigarette types banded with compositions containing varying Flokote-64® starch (National Starch, Berkeley, CA) contents was prepared. Compositions were prepared by combining an appropriate amount of starch powder in tap water as summarized in Table 8. The starch/water combination was heated at approximately 90°C for about 10 minutes.

[0071] Cigarette types 4-A, 4-B, 4-C, 4-D, and 4-E were made from cigarette papers gravure printed with starch compositions as listed in Table 8 and 9. Gravure printing was performed using an about 8 millimeter band width and an about 25 millimeter center-to-center spacing. Smoking articles were made using separate banded wrappers, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend. The cigarettes were made on a conventional cigarette-making machine.

[0072] During cigarette production, approximately 2,000 cigarettes were collected. The cigarettes were collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The starch compositions gave low visibility bands when applied on the cigarettes.

Table 8.

Starch Compositions Used.			
Composition #	Starch (g)	Water (mL)	Composition (%) *
4-1	600	4000	13.04
4-2	750	4000	15.79
4-3	850	4000	17.53
4-4	1000	4000	20.00

\* Weight percent composition Flokote-64® starch (National Starch, Berkeley, CA)

Table 9.

Permeability of Banded Cigarette Paper.			
Cigarette Type	Base Paper	Band Solution *	Band Perm. (CU) **
4-A	A	4-1	10
4-B	A	4-2	8
4-C	A	4-3	6
4-D	A	4-4	4
4-E	B	4-4	5

\* See Table 7

\*\* Perm. = permeability

[0073] Table 10 indicates IP and freeburn results for cigarette types 4-A, 4-B, 4-C, 4-D, and 4-E. Cigarette IP was measured, using about 20 replicates, by the NIST (10-sheet) filter paper test. The freeburn character was measured

using about 6 replicates. The results indicate that significant IP reduction occurs when the band permeability is reduced to less than about 6 CU. The applied permeability reducing agent may be adjusted, such as controlling percent weight, viscosity or the like, to give an effective IP reducing band in the present application in which band position is random on the individual articles in the population.

Table 10.

Summary of Banded Cigarette IP and Freeburn Data.		
Cigarette Type	IP Pass (%) *	Freeburn (%)
4-A	0	100
4-B	0	100
4-C	40	100
4-D	95	95
4-E	85	100

\* NIST (10-sheet) filter paper IP test

**[0074]** Applicants evaluated the smoke taste profile of cigarette type 4-D. The taste when smoking within banded areas differed from the taste in the untreated, non-banded, areas. The band region was characterized as possessing less taste strength and a slight paper-like taste relative to the untreated, non-banded, region.

**[0075]** Example 5. A series of cigarette types banded with compositions containing varying Flokote-64® starch (National Starch, Berkeley, CA) and DAP (Rhodia, Cranbury, NJ) contents was prepared. Compositions were prepared by combining an appropriate amount of starch powder and DAP in tap water as summarized in Table 11. The combinations were heated at approximately 90°C for about 15 minutes.

**[0076]** Cigarette types 5-A through 5-L were made from cigarette papers gravure printed with starch compositions as listed in Table 11 and 12. All cigarette types had a band configuration of about 6 millimeter width and about 25 millimeter center-to-center spacing except types 5-I and 5-J which had a band configuration of about 8 millimeter width and about 25 millimeter center-to-center spacing.

**[0077]** Smoking articles were made using separate banded wrappers, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend. The cigarettes were made on a conventional cigarette-making machine.

Table 11.

Starch Compositions Used.				
Composition #	Starch (g)	DAP (g)	Water (mL)	Composition *
5-1	900	0	4000	18.37% S
5-2	900	12.5	4000	18.27% S, 0.25% DAP
5-3	900	25	4000	18.32% S, 0.51% DAP
5-4	900	50	4000	18.18% S, 1.01% DAP
5-5	900	150	4000	17.82% S, 2.97% DAP
5-6	900	200	4000	17.65% S, 3.92% DAP
5-7	900	300	4000	17.31% S, 5.77% DAP
5-8	1000	0	4000	20.00% S
5-9	1040	150	4000	20.04% S, 2.89% DAP
5-10	1100	50	4000	21.36% S, 0.97% DAP
5-11	1250	50	4000	23.58% S, 0.94% DAP

\* Weight percent composition: S = Flokote-64® starch (National Starch, Berkeley, CA), DAP = diammonium phosphate (Rhodia, Cranbury, NJ)

**[0078]** During cigarette manufacture, approximately 2,000 cigarettes were collected. The cigarettes were collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The starch compositions gave low visibility bands when applied on the cigarettes.

**[0079]** Table 13 indicates IP and freeburn results for cigarette types 5-A through 5-L. Cigarette IP was measured, using about 20 replicates, by the NIST (10-sheet) filter paper test. The freeburn character was measured using about 16 replicates. The results indicate that significant IP reduction occurs when the band permeability is less than about

6 CU, although for the present example freeburn was significantly lowered for the about 4 CU and about 3 CU band permeability samples.

Table 12.

Permeability of Banded Cigarette Paper.			
Cigarette Type	Base Paper	Band Solution *	Band Perm. (CU) **
5-A	A	5-1	6
5-B	A	5-2	--
5-C	A	5-3	--
5-D	A	5-4	6
5-E	A	5-5	6
5-F	A	5-6	6
5-G	A	5-7	6
5-H	A	5-8	--
5-I	A	5-9	3
5-J	B	5-9	4
5-K	A	5-10	--
5-L	A	5-11	--

\* See Table 11

\*\* Perm. = permeability

-- = not determined

Table 13.

Summary of Banded Cigarette IP and Freeburn Data.		
Cigarette Type	IP Pass (%) *	Freeburn (%)
5-A	90	100
5-B	100	93.8
5-C	100	93.8
5-D	100	100
5-E	100	93.8
5-F	100	100
5-G	90	93.8
5-H	100	0
5-I	100	0
5-J	100	10
5-K	100	0
5-L	100	6.3

\* NIST (10-sheet) filter paper IP test

[0080] Applicants evaluated the smoke taste profile of cigarette types 5-A through 5-G. The taste when smoking within banded areas differed from the taste in the untreated, non-banded, areas. The band region was characterized as possessing less taste strength relative to the untreated, non-banded, region. In contrast to cigarette type 4-D (Example 4), the presence of DAP eliminated the slight paper-like taste attributed to using a permeability reducing agent alone to form the banded region. Moreover, composition 5-4 (1.01 weight percent DAP) was sufficient to afford the maximal benefit of DAP presence. Higher contents of DAP, such as composition 5-7, tended to increase the width of the char line as the banded region was smoked through.

[0081] Example 6. A series of cigarette types banded with compositions containing varying Flokote-64® starch (National Starch, Berkeley, CA) and DAP (Rhodia, Cranbury, NJ), and sodium/potassium citrate salt contents was prepared. Smoking articles were made using separate banded wrappers, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend. The cigarettes were made on a conventional cigarette-making machine.

[0082] Cigarette type 6-A was made from cigarette paper A gravure printed with a composition containing about 20.65 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.94 weight percent DAP (Rhodia, Cranbury, NJ), 3.32 weight percent citrate salt, and about 75.09 weight percent tap water. The citrate salt was a mixture of sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ) and potassium citrate monohydrate (Fisher Scientific, Fair Lawn, NJ) in an about 1:2.8 weight/weight ratio. The composition was heated at approximately 87°C for about 15 minutes.

[0083] Cigarette type 6-B was made from cigarette paper A gravure printed with a composition containing about 21.36 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.97 weight percent DAP (Rhodia, Cranbury, NJ), and about 77.67 weight percent tap water. The composition was heated approximately 87°C for about 15 minutes.

[0084] Cigarette type 6-C was made from cigarette paper A gravure printed with a composition containing about 19.56 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.89 weight percent DAP (Rhodia, Cranbury, NJ), about 8.44 weight percent citrate salt, and about 71.11 weight percent tap water. The citrate salt was a mixture of sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ) and potassium citrate monohydrate (J.T. Baker, Phillipsburg, NJ) in an about 1:2.8 weight/weight ratio. The composition was heated at approximately 87°C for about 15 minutes.

[0085] During cigarette manufacture, approximately 2,000 cigarettes were collected. The cigarettes were collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The starch compositions gave low visibility bands when applied on the cigarettes.

[0086] Table 14 indicates IP and freeburn results for cigarette types 6-A, 6-B, and 6-C. Cigarette IP was measured, using about 20 replicates, by the NIST (10-sheet) filter paper test. The freeburn character was measured using about 64 replicates for article types 6-A and 6-B and about 16 replicates for article type 6-C.

Table 14.

Summary of Banded Cigarette IP and Freeburn Data.		
Cigarette Type	IP Pass (%) *	Freeburn (%)
6-A	100	87.5
6-B	100	34.4
6-C	100	90.0

\* NIST (10-sheet) filter paper IP test

[0087] Both the burn rate retarding substance (such as DAP) and the burn rate accelerating substance (such as sodium/potassium citrate salt) are beneficial band additives that influence the ability of the article to freeburn. High levels of the permeability reducing substance (such as starch) deposited in the band may increase the IP pass rate of the cigarette (see Example 4), but will decrease the ability of the cigarette to freeburn particularly when combined with the burn rate retarding substance (see Example 5). The burn rate accelerating substance (such as sodium/potassium citrate salt) is a beneficial band component because this burn promoter can be used to increase the ability of a heavily banded cigarette to freeburn while maintaining concurrent reduced IP character.

[0088] Furthermore, applicants have discovered the unexpected organoleptic enhancing abilities of the burn rate accelerating substance preferably in combination with the burn rate retarding substance. The smoke taste profile of cigarette 6-C was substantially consistent when smoking within banded areas and smoking in the untreated, non-banded, areas.

[0089] Example 7. Two smoking articles were made using a banded wrapper, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and cigarette tobacco blend. The cigarettes were made on a conventional cigarette-making machine. The smoking articles were made using separate banded cigarette papers.

[0090] Cigarette type 7-A was made from cigarette paper A gravure printed with a composition containing about 18.18 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 1.01 weight percent monoammonium phosphate (Fisher Scientific, Fair Lawn, NJ), and about 80.81 weight percent tap water. The composition was heated at approximately 87° for about 15 minutes.

[0091] Cigarette type 7-B was made from cigarette paper A gravure printed with a composition containing about 17.82 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 2.97 weight percent monoammonium phosphate (Fisher Scientific, Fair Lawn, NJ), and about 79.21 weight percent tap water. The composition was heated at approximately 87°C for about 15 minutes.

[0092] During cigarette production, approximately 2,000 cigarettes were collected for each type. The cigarettes were

collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The banded, reduced IP, papers ran substantially the same as non-banded cigarette paper A. No manufacturing problems were observed during cigarette production.

[0093] Table 15 indicates IP and freeburn results for cigarettes 7-A and 7-B. Article IP was measured, using about 20 replicates, by the NIST (10-sheet) filter paper test. The freeburn character was measured using about 16 replicates. The IP results indicate that starch combined with monoammonium phosphate is an effective IP reducing material in the present application in which band position is random on the individual articles in the population.

Table 15.

Summary of Banded Cigarette IP and Freeburn Data.		
Cigarette Type	IP Pass (%) **	Freeburn (%)
7-A	100	43.8
7-B	100	62.5

\*\* NIST (10-sheet) filter paper IP test

[0094] Example 8. One smoking articles was made using a banded wrapper, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and cigarette tobacco blend. The cigarette was made on a conventional cigarette-making machine.

[0095] Cigarette type 8-A was made from cigarette paper A gravure printed with a composition containing about 15.24 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.95 weight percent DAP (Rhodia, Carnbury, NJ), about 7.62 weight percent microcrystalline cellulose (Aldrich, Milwaukee, WI, Catalog #31,069-7), and about 76.19 weight percent tap water. The starch/DAP composition heated at approximately 87°C for about 15 minutes then the cellulose component was dispersed before printing.

[0096] During manufacturing, approximately 2,000 articles of type 8-A were collected. The cigarettes were collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The banded, reduced IP, papers ran substantially the same as non-banded cigarette paper A. No manufacturing problems were observed during cigarette production.

[0097] The composition used to band article type 8-B contained about 14.61 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.97 weight percent DAP (Rhodia, Carnbury, NJ), about 2.16 weight percent sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ), about 6.05 weight percent potassium citrate monohydrate (J.T. Baker, Phillipsburg, NJ), about 4.40 weight percent colloidal cellulose (Aldrich, Milwaukee, WI; Catalog #43,524-4), and about 71.82 weight percent tap water. The starch/DAP/citrate salt composition was heated at approximately 90°C for about 20 minutes then the cellulose component was dispersed before applying the material to articles.

[0098] Cigarette type 8-B was hand banded with the starch/DAP/cellulose composition to give a circumferential band, about 7 millimeters wide, around the body of a smoking article. The circumferential band was positioned about 20 millimeters from the ignition end of the finished article. The smoking article was prepared using cigarette paper A, an about 72 millimeter tobacco column length, an about 25 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend.

[0099] The fixed-position band of article type 8-B was applied on the smoking article by hand using an aluminum printing plate, and the wet weight of added material was measured. The applied total dry weight of banding material was calculated to be about 1.4 milligrams.

[0100] Table 16 indicates IP and freeburn results for cigarettes 8-A and 8-B. Cigarette IP was measured, using about 20 replicates for 8-A and 4 replicates for 8-B, by the NIST (10-sheet) filter paper test. The freeburn character was measured using about 16 replicates for 8-A and 4 replicates for 8-B. The IP results indicate that starch/DAP, or more preferably starch/DAP/citrate salt, combined with cellulose is an effective IP reducing material in the present application in which band position is either random or fixed on the individual articles in the population.

Table 16.

Summary of Banded Cigarette IP and Freeburn Data.		
Cigarette Type	IP Pass (%) *	Freeburn (%)
8-A	45	100
8-B	100	100

\* NIST (10-sheet) filter paper IP test

[0101] Example 9. Cigarette types 9-A and 9-B were hand banded with compositions to give a circumferential band, about 7 millimeters wide, around the body of a smoking article. The circumferential band was positioned about 20 millimeters from the ignition end of the finished article. The smoking article was prepared using cigarette paper A, an about 72 millimeter tobacco column length, an about 25 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend.

[0102] The fixed-position band of was applied on the smoking article by hand using an aluminum printing plate, and the wet weight of added material was measured. The applied dry weights of banding materials were calculated and found to be about 1.4 milligrams (total dry material weight) for article type 9-A and about 0.82 milligrams (total dry material weight) for article type 9-B.

[0103] The composition used to band article type 9-A contained about 14.47 weight percent Flokote-64® starch (National Starch, Berkeley, CA), 0.96 weight percent DAP (Rhodia, Carnbury, NJ), about 2.14 weight percent sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ), about 6.00 weight percent potassium citrate monohydrate (J.T. Baker, Phillipsburg, NJ), about 5.30 weight percent calcium carbonate (Aldrich, Milwaukee, WI; Catalog #31,003-4), and about 71.14 weight percent tap water. The starch/DAP/citrate salt composition was heated at approximately 90°C for about 20 minutes then the calcium carbonate component was dispersed before applying the material to the articles.

[0104] The composition used to band article type 9-B contained about 14.56 weight percent Flokote-64® starch (National Starch, Berkeley, CA), 0.96 weight percent DAP (Rhodia, Carnbury, NJ), about 2.15 weight percent sodium citrate dihydrate (Fisher Scientific, Fair Lawn, NJ), about 6.04 weight percent potassium citrate monohydrate (J.T. Baker, Phillipsburg, NJ), about 4.70 weight percent Kaolin clay (Aldrich, Milwaukee, WI; Catalog #22,883-4), and about 71.59 weight percent tap water. The starch/DAP/citrate salt composition was heated at approximately 90°C for about 20 minutes then the Kaolin clay component was dispersed before applying the material to the articles.

[0105] Table 17 indicates IP and freeburn results for cigarettes 9-A and 9-B. Cigarette IP was measured, using about 4 replicates, by the NIST (10-sheet) filter paper test. The freeburn character was measured using about 4 replicates. The IP results indicate that starch/DAP/citrate salt combined with filler, such as calcium carbonate, clay, and the like, is an effective IP reducing material in the present application in which band position is fixed on the individual articles in the population.

[0106] Applicants anticipate that the composition applied to articles may be adjusted due to synergistic interactions between filler and other band components. For example, article 9-B incorporates Kaolin clay as a band component, which appears to synergistically enhance the performance of the burn rate retarding substance and/or the permeability reducing substance. As a further example, article 9-A incorporates an alkali earth salt, calcium carbonate, known to act as paper burn rate accelerating substance, which may interact synergistically with the burn rate accelerating component. Alternatively, the filler component may cooperate with the permeability reducing substance.

Table 17.

Summary of Banded Cigarette IP and Freeburn Data.		
Cigarette Type	IP Pass (%) *	Freeburn (%)
9-A	100	100
9-B	100	25

\* NIST (10-sheet) filter paper IP test

[0107] Example 10. A series of base cigarette papers were banded with a composition containing Flokote-64® starch (National Starch, Berkeley, CA) and DAP (Rhodia, Cranbury, NJ). Smoking articles were made using separate banded wrappers, an about 63 millimeter tobacco column length, an about 21 millimeter cellulose acetate non-air diluted filter section, and a cigarette tobacco blend. The cigarettes were made on a conventional cigarette-making machine.

[0108] Cigarette types were made from a series of cigarette papers, as listed in Table 18, gravure printed with a composition containing about 21.36 weight percent Flokote-64® starch (National Starch, Berkeley, CA), about 0.97 weight percent DAP (Rhodia, Cranbury, NJ), and about 77.67 weight percent tap water. The composition was heated at approximately 87°C for about 15 minutes.

Table 18.

Summary of Banded Cigarette IP and Freeburn Data.			
Cigarette Type	Base Paper	IP Pass (%) *	Freeburn (%)
10-A	A	100	34

\* NIST (10-sheet) filter paper IP test



Table 18. (continued)

Summary of Banded Cigarette IP and Freeburn Data.			
Cigarette Type	Base Paper	IP Pass (%) *	Freeburn (%)
10-B	D	100	56.3
10-C	E	100	57.0
10-D	F	100	62.5
10-E	G	80	100
10-F	A**	100	43.8
10-G	H	50	100

\* NIST (10-sheet) filter paper IP test

\*\* Base paper A electrostatically perforated to about 70 CU

[0109] During manufacturing, approximately 2,000 articles of type 10-A through 10-G were collected. The cigarettes were collected such that the individual cigarettes were randomly mixed in a collection box. Therefore, the band positions on the manufactured cigarettes may be characterized as random. The banded, reduced IP, papers ran substantially the same as non-banded cigarette paper A. No manufacturing problems were observed during cigarette production.

[0110] The IP and freeburn data in Table 18 demonstrate that at constant applied band composition, and application method, results may vary depending on the structure of the base paper. Articles prepared from the higher permeability papers, 10-E and 10-H, showed lower IP pass rates than articles 10-A through 10-F. Applicants believe that increasing the applied amount of the composition will increase IP pass rate for higher base paper permeability types (such as 10-E and 10-G). For articles 10-A through 10-D and 10-F applicants fully expect that the freeburn value may be increased by the incorporation of a burn rate accelerating substance in the band.

[0111] Article type 10-F used an about 18 CU base paper (A) electrostatically perforated, before band printing, to about 70 CU. After banding, the permeability in the band region was measured as about 57 CU. Article type 10-A, utilizing base paper A, had a measured band permeability of about 5 CU. Interestingly, article types 10-A and 10-F gave similar IP and freeburn results. This example demonstrates the unexpected result that perforation in the banded region, at the level applied, does not degrade the IP performance. Applicants fully anticipate higher levels of perforation may give similar results.

[0112] An important consideration for the design of commercially acceptable reduced IP articles is product smoke delivery. Smoke delivery is the quantity of various smoke components produced by the article during its consumption. For this example, carbon monoxide was used as a surrogate for all components delivered by the article. An article manufactured from a paper containing a banded region of lower permeability than the non-banded region may display increased smoke delivery relative to the non-banded control article. The width, spacing, composition, and number of the bands may also affect smoke delivery changes.

[0113] For example in Table 19, an article type prepared from base paper A gave a carbon monoxide delivery of about 18.2 milligrams/cigarette, but the same wrapper in a banded state (band permeability about 5 CU) caused the delivery to increase to about 21.3 milligrams/cigarette. Applicants have demonstrated that substituting a higher permeability base paper will afford smoke deliveries similar to the control type (for example 10-B through 10-G versus control).

[0114] Additionally, applicants have discovered the unexpected result that incorporating a burn accelerating substance in the band (such as article type 6-C) can give a lower smoke delivery relative to the banded article not containing the burn accelerating substance (such article type 10-A).

Table 19.

Carbon Monoxide Content of Banded and Control Articles.	
Cigarette Type	Carbon Monoxide (milligrams/cigarette)
Control *	18.2
10-A	21.3
6-C	20.6
10-B	18.3
10-C	18.4
10-D	17.6

\* Control, non-banded, article manufactured with base paper A

Table 19. (continued)

Carbon Monoxide Content of Banded and Control Articles.	
Cigarette Type	Carbon Monoxide (milligrams/cigarette)
10-E	17.3
10-F	18.5
10-G	17.6

[0115] Certain modifications and improvements will occur to those skilled in the art upon a reading of the foregoing description. By way of example, an alternative method for controlling smoke delivery may be used. Examples of such alternative methods include diluting filter smoke with air, changing tobacco blend, and altering base paper burn regulator composition. It should be understood that all such modifications and improvements have been deleted herein for the sake of conciseness and readability but are properly within the scope of the following claims.

#### Claims

1. A smoking article having reduced ignition propensity comprising:

a tobacco column and  
a wrapper surrounding the tobacco column and having a base permeability, the wrapper comprising:

an untreated area and  
a least one discrete area treated with a composition to reduce the base permeability so that as a coal of a burning tobacco firecone advances by the treated area, the smoking article self-extinguishes if placed on a surface, the composition comprising:

a permeability reducing substance;  
a burn rate retarding substance; and  
a burn rate accelerating substance.

2. The smoking article of claim 1, further comprising a filter element.

3. A wrapper for surrounding a tobacco column to create a smoking article having reduced ignition propensity, the wrapper having a base permeability and comprising:

an untreated area and  
a least one discrete area treated with a composition to reduce the base permeability so that as a coal of a burning tobacco firecone advances by the treated area, the smoking article self-extinguishes if placed on a surface, the composition comprising:

a permeability reducing substance,  
a burn rate retarding substance and  
a burn rate accelerating substance.

4. The smoking article according to claim 1 or 2, or wrapper according to claim 3, wherein at least one of said burn rate retarding substance and said burn rate accelerating substance is further an organoleptic enhancing substance that substantially reduces any difference in a smoker's experience between the smoking of said at least one treated area and said untreated area during smoking of the article.

5. The smoking article or wrapper according to any preceding claim, wherein a consistency of the combination of the permeability reducing substance, the burn rate retarding substance and the burn rate accelerating substance is such as to be applicable to the wrapper.

6. The smoking article or wrapper according to claim 5, wherein a consistency of the combination of the permeability reducing substance, the burn rate retarding substance and the burn rate accelerating substance is such as to be

applicable to the wet wrapper.

7. The smoking article or wrapper according to claim 5, wherein a consistency of the combination of the permeability reducing substance, the burn rate retarding substance and the burn rate accelerating substance is such as to be applicable to the dry wrapper.
8. The smoking article or wrapper according to any preceding claim, wherein said burn rate accelerating substance is a salt.
9. The smoking article or wrapper according to claim 8, wherein said salt is one of an alkali metal containing compound and an alkali-earth metal containing compound.
10. The smoking article or wrapper according to claim 9, wherein said one of an alkali metal containing compound and an alkali-earth metal containing compound is a salt of a carboxylic acid.
11. The smoking article or wrapper according to claim 10, wherein said salt of a carboxylic acid is a salt of at least one of acetic acid, citric acid, malic acid, lactic acid, glycolic acid, tartaric acid, fumaric acid, maleic acid, malonic acid, glutaric acid, adipic acid and succinic acid.
12. The smoking article or wrapper according to claim 10, wherein said salt of a carboxylic acid is a salt of citric acid.
13. The smoking article or wrapper according to claim 9, wherein said alkali metal containing compound is a sodium containing compound.
14. The smoking article or wrapper according to claim 9, wherein said alkali metal containing compound is a potassium containing compound.
15. The smoking article or wrapper according to any preceding claim, wherein the burn rate retarding substance is a phosphate.
16. The smoking article or wrapper according to claim 15, wherein said phosphate is a phosphate of ammonium.
17. The smoking article or wrapper according to claim 16, wherein said phosphate of ammonium is diammonium phosphate.
18. The smoking article or wrapper according to any preceding claim, wherein the at least one discretely treated area comprises a band.
19. The smoking article or wrapper according to claim 18, wherein the band has a sufficient width so as to deprive the coal of the burning tobacco firecone of oxygen from behind a char line of the wrapper.
20. The smoking article or wrapper according to claim 18 or 19, wherein the band has a width of at least about 3 millimeters.
21. The smoking article or wrapper according to any preceding claim, wherein the at least one discretely treated area comprises at least two bands spaced sufficiently to reduce the ignition propensity of the smoking article.
22. The smoking article or wrapper according to claim 21, wherein the at least two bands have widths and are spaced apart so that a width/center-to-center spacing ratio is between about 1/10 and about 1/1.
23. The smoking article or wrapper according to claim 21, wherein said at least two bands have a width/to center-to-center spacing ratio of at least about 1/10 to greater than about 1/1.
24. The smoking article or wrapper according to claim 21, 22 or 23, wherein the at least two bands have widths between about 3 millimeters and about 10 millimeters.
25. The smoking article or wrapper according to any of claims 21 to 24, wherein the at least two bands have a center-to-center spacing of about 10 millimeters to about 30 millimeters.

26. The smoking article or wrapper according to any preceding claim, wherein the wrapper has properties that enable a bobbin of wrapper to be useable in a conventional commercially available cigarette manufacturing machine.
- 5 27. The smoking article or wrapper according to any preceding claim, wherein said at least one discretely treated area has a thickness so as to make a bobbin of wrapper useable in a commercially available cigarette manufacturing machine.
- 10 28. The smoking article or wrapper according to any preceding claim, wherein the at least one treated area is visually substantially the same as the at least one untreated area.
- 15 29. A composition for application to a paper having a base permeability to create a wrapper having at least one discretely treated area and suitable for surrounding a tobacco column to create a smoking article having reduced ignition propensity, said composition initially comprising a combination of substances and water such that when the wrapper is dry the at least one discretely treated area has a reduced permeability, and includes a burn rate retarding substance and a burn rate accelerating substance.
- 20 30. The composition according to claim 29, wherein at least one of said burn rate retarding substance and said burn rate accelerating substance is further an organoleptic enhancing substance that substantially reduces any difference in a smoker's experience between the smoking of said at least one treated area and an untreated area during of the smoking of the smoking article.
- 25 31. The composition according to claim 29 or 30, having a consistency such as to be applicable to a wet paper.
32. The composition according to claim 29 or 30, further including a consistency such as to be applicable to a dry paper.
33. The composition according to any of claims 29 to 32, wherein said burn rate accelerating substance is a salt prior to combination with the water.
- 30 34. The composition according to claim 33, wherein said salt is one of an alkali metal containing compound and an alkali-earth metal containing compound prior to combination with the water.
- 35 35. The composition according to claim 34, wherein said one of an alkali metal containing compound and an alkali-earth metal containing compound is a salt of a carboxylic acid prior to combination with the water.
36. The composition according to claim 35, wherein said salt of a carboxylic acid is a salt of at least one of acetic acid, citric acid, malic acid, lactic acid, glycolic acid, tartaric acid, fumaric acid, maleic acid, malonic acid, glutaric acid, adipic acid and succinic acid prior to combination with the water.
- 40 37. The composition according to claim 35, wherein said salt of a carboxylic acid is a salt of citric acid prior to combination with the water.
38. The composition according to claim 34, wherein said alkali metal containing compound is a sodium containing compound prior to combination with the water.
- 45 39. The composition according to claim 34, wherein said alkali metal containing compound is a potassium containing compound prior to combination with the water.
40. The composition according to any of claims 29 to 39, wherein the burn rate retarding substance is a phosphate prior to combination with the water.
- 50 41. The composition according to claim 40, wherein said phosphate is a phosphate of ammonium prior to combination with the water.
42. The composition according to claim 41, wherein said phosphate of ammonium is diammonium phosphate prior to combination with the water.
- 55 43. The smoking article, wrapper or composition according to any preceding claim, wherein said permeability reducing substance is a pore filling substance thereby reducing permeability of said at least one treated area.

44. The smoking article, wrapper or composition according to any preceding claim, wherein said permeability reducing substance is a film forming substance, thereby reducing permeability of said at least one treated area.

5 45. The smoking article, wrapper or composition according to any preceding claim, wherein said permeability reducing substance is a polymer.

46. The smoking article, wrapper or composition according to claim 45, wherein said polymer is a polysaccharide.

10 47. The smoking article, wrapper or composition according to claim 46, wherein said polysaccharide is water soluble.

48. The smoking article, wrapper or composition according to claim 46, wherein said polysaccharide is water dispersible.

15 49. The smoking article, wrapper or composition according to claim 46, 47 or 48, wherein said polysaccharide is at least one of starch, modified starch and a starch derivative.

50. The smoking article, wrapper or composition according to claim 46, 47 or 48, wherein said polysaccharide is at least one of cellulose and a cellulose derivative.

20 51. The smoking article, wrapper or composition according to claim 46, 47 or 48, wherein said polysaccharide is at least one of chitosan and a chitosan derivative.

52. The smoking article, wrapper or composition according to claim 46, 47 or 48, wherein said polysaccharide is at least one of chitin and a chitin derivative.

25 53. The smoking article, wrapper or composition according to claim 46, 47 or 48, wherein said polysaccharide is at least one of alginate and an alginate derivative.

30 54. A method for making a smoking article having reduce ignition propensity comprising:

treating a plurality of discrete areas of paper having a base permeability with an aqueous composition , to form discrete areas that have a reduced permeability and include a burn rate retarding substance and a burn rate accelerating substance, thereby forming a wrapper; and

35 surrounding a tobacco column with at least a portion of the wrapper so that a least one discretely treated area substantially surrounds the tobacco column between the ends of the wrapper-surrounded tobacco column so that as a coal of a burning tobacco firecone advances by said at least one treated area, the smoking article self-extinguishes if left on a surface.

40 55. A method for making a wrapper for surrounding a tobacco column to create a smoking article including a least one discrete area treated with a composition to reducing a base permeability so that as a coal of a burning tobacco firecone advances by said at least one treated area, the smoking article self-extinguishes, the smoking article thereby having reduced ignition propensity comprising:

45 treating a plurality of discrete areas of paper having a base permeability with an aqueous composition, drying the discrete areas such that the discrete areas have a reduced permeability and include a burn rate retarding substance and a burn rate accelerating substance thereby forming a wrapper, wherein at least one of said burn rate retarding substance and said burn rate accelerating substance is further an organoleptic enhancing substance that substantially reduces any difference in a smoker's experience between the smoking of said discretely treated areas and untreated areas.

50 56. A method for making a smoking article having reduced ignition propensity comprising:

55 treating a plurality of discrete areas of paper having a base permeability with an aqueous composition, drying the discrete areas such that the discrete areas have a reduced permeability and include a burn rate retarding substance and a burn rate accelerating substance, thereby forming a wrapper;

surrounding a tobacco column with at least a portion of the wrapper so that at least one discretely treated area is found between the ends of the wrapper-surrounded tobacco column so that as a coal of a burning tobacco firecone advances by said at least one treated area, the smoking article self-extinguishes if left on a surface;

and

adding a filter element to at least one end of the wrapper-surrounded tobacco column, wherein at least one of said burn rate retarding substance and said burn rate accelerating substance is further an organoleptic enhancing substance that substantially reduces any difference in a smoker's experience between the smoking of said at least one treated area and said untreated area during of the smoking article.

57. A smoking article comprising:

a tobacco column,  
a paper wrapped around the tobacco column having at least one band made up of starch, diammonium phosphate and citric acid.

58. A smoking article as claimed in claim 57, wherein the band is made of an applied ink of about 15 to about 27% starch, about 0 to about 6% alkali metal citrate salt and about 0 to about 5% DAP.

59. A smoking article as claimed in claim 57, wherein the band is made of an ink of about 18 to 24% starch, about 3 to 6% citrate, and about 1 % DAP.

60. A smoking article as claimed in claim 57, 58 or 59, wherein the paper has a location without the band and the permeability of such location is between about 18 CU and about 71 CU.

61. A population of smoking articles having a reduced ignition propensity comprising:

a plurality of smoking articles, each smoking article comprising

a tobacco column,  
a wrapper surrounding said tobacco column so that the smoking article includes an ignition end and a distal end, and  
at least one banded region between the ignition end and the distal end having a combustion characteristic substantially different from that of an unbanded region; and

a distance from the ignition end to the at least one band of each smoking article being at least one of random, quasi-random and sequentially related within the population.

62. The population of smoking articles claim 61, comprising a package of smoking articles, or a grab sample of smoking articles.

63. A population of smoking articles having a reduced ignition propensity comprising:

a plurality of smoking articles, each smoking article comprising

a tobacco column,  
a wrapper surrounding said tobacco column so that the smoking article includes an ignition end and a distal end, and  
at least two spaced apart banded regions between the ignition end and the distal end having a combustion characteristic substantially different from that of an unbanded region; and

a distance from the ignition end to at least one of the banded regions of each smoking article being at least one of random, quasi-random and sequentially related within the population.

64. The population of smoking articles according to claim 63, wherein the distance is random.

65. The population of smoking articles according to claim 63 or 64, wherein the ignition propensity for the population is between about 50 and substantially about 100 percent.

66. The population of smoking articles according to claim 63, 64 or 65, wherein the banded regions comprise at least one of a permeability reducing substance, a burn rate retarding substance, and a burn rate accelerating substance.

67. The population of smoking articles according to claim 66, wherein the banded regions comprise at least two of a permeability reducing substance, a burn rate retarding substance, and a burn rate accelerating substance.

68. The population of smoking articles according to claim 67, wherein the banded regions comprise a permeability reducing substance, a burn rate retarding substance, and a burn rate accelerating substance.

69. The population of smoking articles according to any of claims 63 to 68, wherein said at least two banded regions are spaced sufficiently to reduce the ignition propensity of the smoking article.

70. The population of smoking articles according to claim 69, wherein said at least two banded regions are spaced sufficiently to facilitate the free burn of the smoking article.

71. The population of smoking articles according to any of claims 63 to 70, wherein said at least two banded regions have a width/center-to-center spacing ratio of at least about 1/10 to greater than about 1 /1.

72. The population of smoking articles according to any of claims 63 to 71, wherein said at least two banded regions have a width of at least about 3 millimeters to about 10 millimeters.

73. The population of smoking articles according to any of claims 63 to 72, wherein said at least two banded regions have a center-to-center spacing of about 10 millimeters to about 30 millimeters.

74. The population of smoking articles according any of claims 63 to 73, wherein said at least two banded regions are visually substantially the same unbanded regions.

75. A package of smoking articles having a reduced ignition propensity comprising:

a package;

twenty smoking articles within said package, each smoking article comprising

a tobacco column,

a wrapper surrounding said tobacco column so that the smoking article includes an ignition end and a distal end, and

at least two spaced apart banded regions between the ignition end and the distal end having a combustion characteristic substantially different from that of an unbanded region; and

a distance from the ignition end to at least one of the banded regions of each smoking article being at least one of random, quasi-random and sequentially related within the package.

76. A grab sample of smoking articles having a reduced ignition propensity comprising:

a plurality of smoking articles, each smoking article comprising

a tobacco column,

a wrapper surrounding said tobacco column so that the smoking article includes an ignition end and a distal end, and

at least two spaced apart banded regions between the ignition end and the distal end having a combustion characteristic substantially different from that of an unbanded region; and

a distance from the ignition end to at least one of the banded regions of each smoking article being at least one of random, quasi-random and sequentially related within the grab sample.

77. A cigarette paper for use in making a cigarette having reduced ignition propensity comprising:

a fibrous paper having a base permeability, an untreated area and a treated area, the treated area being treated with a composition to reduce the base permeability so that when the paper is made in to a cigarette that is smoked, as a coal of a burning tobacco firecone advances by the treated area, the cigarette self-extinguishes if placed on a surface, the composition comprising:

a permeability reducing substance present in sufficient quantity to effect the self-extinction; and  
a burn rate accelerating substance present in sufficient quantity to cause a smoker's organoleptic experience to be substantially indistinguishable from the organoleptic experience of smoking the untreated area of the cigarette.

5

78. The cigarette paper according to claim 77, wherein at least one of the untreated area and the treated area are further perforated.

10

79. The cigarette paper according to claim 77 or 78, wherein the untreated area and the treated area are perforated.

80. The cigarette paper according to claim 77, 78 or 79, wherein said burn rate accelerating substance is one of an alkali metal containing compound and an alkali-earth metal containing compound prior to combination with the water.

15

81. The cigarette paper according to claim 77, 78 or 79, wherein said burn rate accelerating substance is monoammonium phosphate prior to combination with the water.

20

25

30

35


40

45


50

55




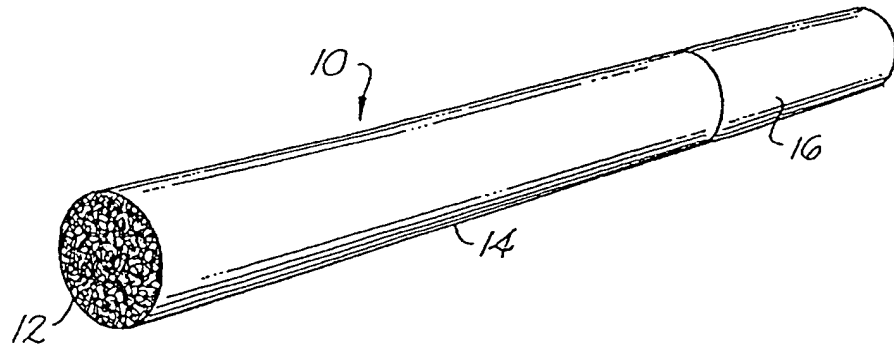


*Fig. 1*

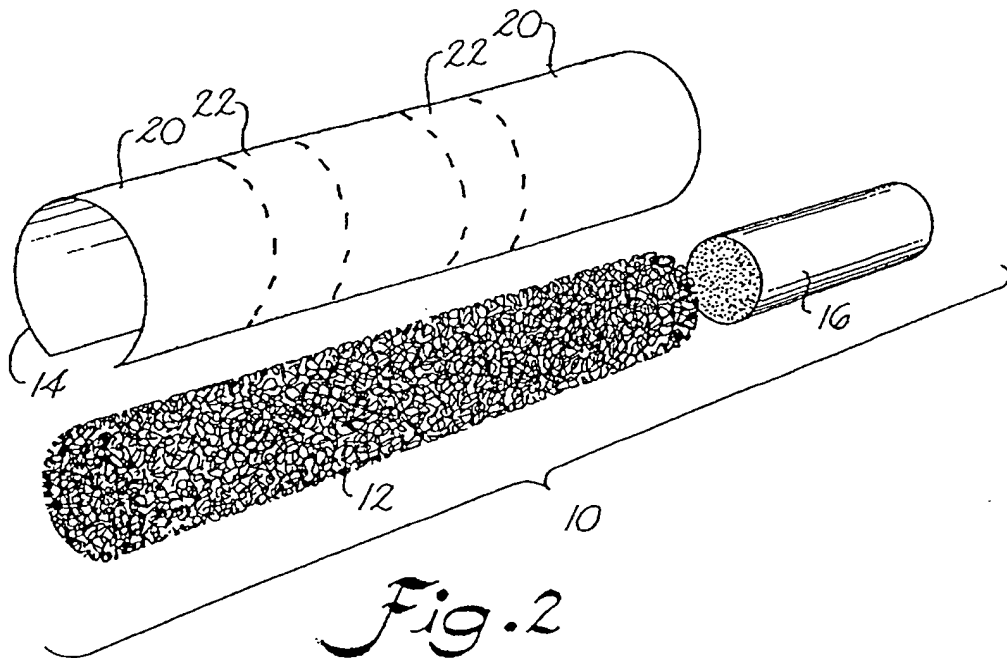


*Fig. 2*




*Fig. 3*

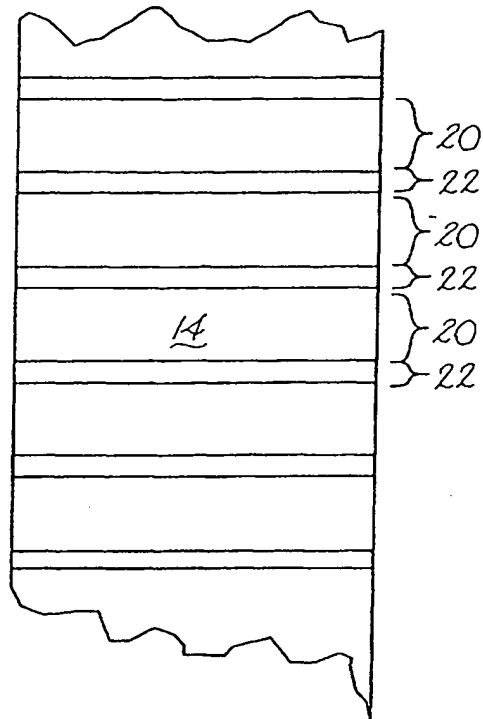


*Fig. 4*

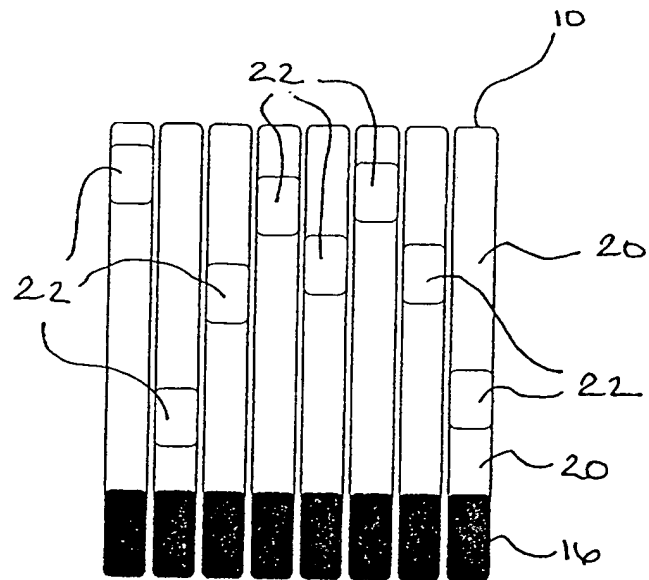


*Fig. 5A*

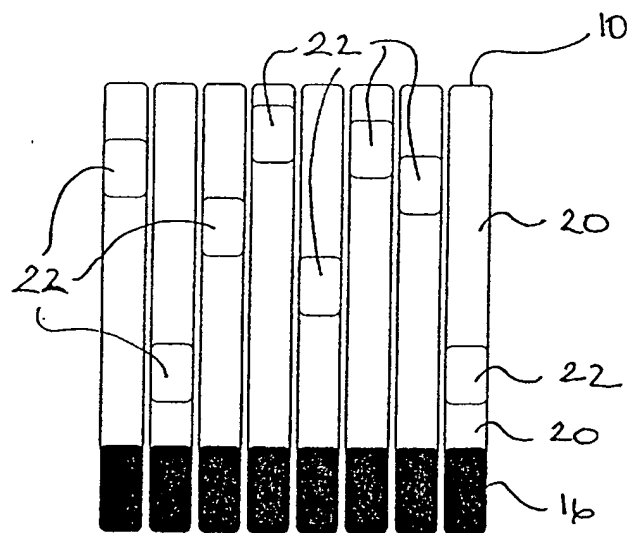

*Fig. 5B*

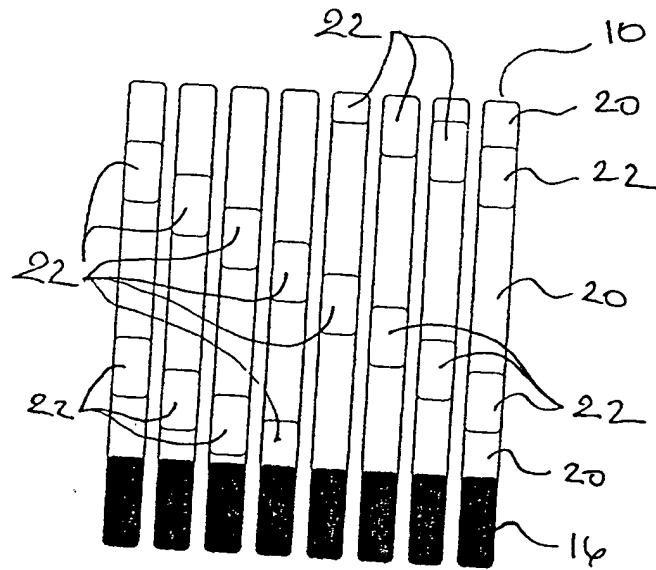

*Fig. 5C*



*Fig. 6.*



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**02.01.2003 Bulletin 2003/01**

(51) Int Cl.7: **A24D 1/02**

(43) Date of publication A2:  
**28.08.2002 Bulletin 2002/35**

(21) Application number: **01304017.5**

(22) Date of filing: **02.05.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Jessup, Terry D.  
Jamestown, North Carolina 27282 (US)
- Williams, David L.  
Greensboro, North Carolina 27410 (US)
- Zawadzki, Michael A.  
Greensboro, North Carolina 27409 (US)
- Ihrig, Arthur M.  
Greensboro, North Carolina 27407 (US)

(30) Priority: **26.02.2001 US 795054**

(71) Applicant: **Lorillard Licensing Company, Llc**  
**Greensboro, North Carolina 27402 (US)**


(74) Representative: **Warren, Anthony Robert et al**  
**BARON & WARREN,**  
**18 South End,**  
**Kensington**  
**London W8 5BU (GB)**

(72) Inventors:  
• Grider, David A.  
Greensboro, North Carolina 27405 (US)

(54) **A reduced ignition propensity smoking article**

(57) A smoking article having reduced ignition propensity is disclosed. The smoking article (10) includes a tobacco column (12), a wrapper (14) surrounding the tobacco column and a filter element (16). The wrapper has a base permeability, and untreated areas (20) alternating with discrete areas (22) treated with a composition to reducing the base permeability. The discretely treated areas (22) interact with a coal of a burning to-

bacco firecone as it advances to self-extinguish the smoking article. The composition of the treated areas includes a permeability reducing substance, a burn rate retarding substance and a burn rate accelerating substance. Either the burn rate retarding substance or the burn rate accelerating substance acts as an organoleptic enhancing substance. In this way a smoker's experience when smoking either the treated areas or the untreated areas is substantially the same.

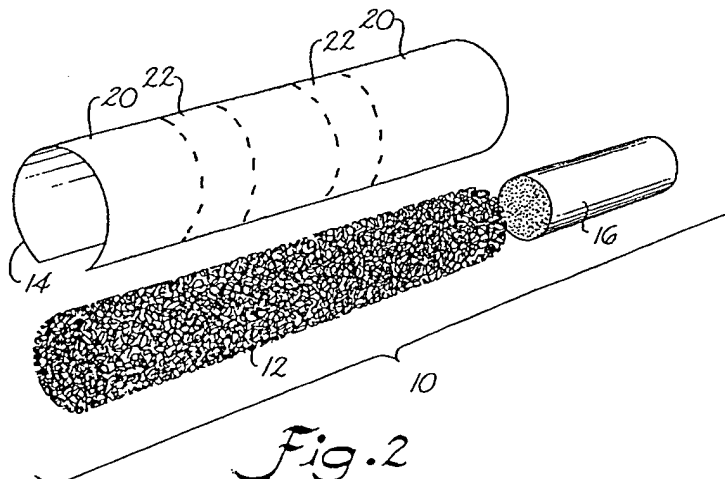

*Fig. 2*



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 4017

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
Y	EP 0 486 213 B (PHILIP MORRIS) 20 May 1992 (1992-05-20) * column 1, paragraph 1 - paragraph 9 * * column 2, paragraphs 2.3 * * column 3, paragraph 2 * * column 4, paragraphs 3.4 * * column 5, paragraphs 1-4 * * figure 4 * ---	1, 3	A24D1/02
Y	US 4 452 259 A (NORMAN VELLO ET AL) 5 June 1984 (1984-06-05) * column 2, paragraph 5 * * column 3, paragraph 3 * * column 5; example 1 * * claims 1,9,13 * ---	1, 3	
A	US 5 060 674 A (BROWN J PAGE ET AL) 29 October 1991 (1991-10-29) * column 2, line 14 - line 29 * * column 3, paragraph 1 - paragraph 4 * * column 6, paragraph 2 * * claims 1-3,12 * ---	1-81	
A	EP 0 403 129 A (PHILIP MORRIS) 19 December 1990 (1990-12-19) * column 2, line 35 - line 44 * * column 4, line 33 - line 39 * * column 4, line 49 - column 5, line 12 * * claims 1,5-8 * ---	1-81	
A	EP 0 870 437 A (SCHWEITZER MAUDUIT INT INC) 14 October 1998 (1998-10-14) * figures 2-4 * * column 1, paragraphs 1,2 * * column 6, paragraph 3 * * figures 2-4 * ---	1-81	
			TECHNICAL FIELDS SEARCHED (InCL7)
			A24D
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		30 October 2002	Inceisa, L
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : technological background O : non-written disclosure P : intermediate document A : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 (01.02.97) (P04021)



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 4017

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
A	US 4 077 414 A (BAKER RICHARD ROLAND ET AL) 7 March 1978 (1978-03-07) * the whole document *	1-81	
A	US 4 615 345 A (DUROCHER DONALD F) 7 October 1986 (1986-10-07) * the whole document *	1-81	
A	US 2 013 508 A (ELMER SEAMAN STEWART) 3 September 1935 (1935-09-03) * the whole document *	1-81	
			TECHNICAL FIELDS SEARCHED (Int.CI.7)
The present search report has been drawn up for all claims			
Place of search:		Date of completion of the search:	Examiner
THE HAGUE		30 October 2002	Inceisa, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  X : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01/02 (F04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 4017

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-10-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0486213	B	20-05-1992	AT 153507 T	15-06-1997
			AU 649493 B2	26-05-1994
			AU 8775591 A	21-05-1992
			CA 2055717 A1	17-05-1992
			DE 69126277 D1	03-07-1997
			DE 69126277 T2	04-12-1997
			DK 486213 T3	24-11-1997
			EP 0486213 A1	20-05-1992
			ES 2101723 T3	16-07-1997
			FI 915419 A ,B,	17-05-1992
			GR 3024484 T3	28-11-1997
			JP 3170330 B2	28-05-2001
			JP 4289298 A	14-10-1992
			NO 914487 A	18-05-1992
			US 5474095 A	12-12-1995
US 4452259	A	05-06-1984	AT 21990 T	15-09-1986
			AU 553106 B2	03-07-1986
			AU 8578882 A	13-01-1983
			CA 1174138 A1	11-09-1984
			DE 3273176 D1	16-10-1986
			DE 69934 T1	15-09-1983
			EP 0069934 A2	19-01-1983
			JP 58020182 A	05-02-1983
US 5060674	A	29-10-1991	CA 2024367 A1	13-07-1991
EP 0403129	A	19-12-1990	US 5143098 A	01-09-1992
			EP 0403129 A2	19-12-1990
			JP 3033299 A	13-02-1991
			NO 902592 A ,B,	13-12-1990
			PT 94341 A	08-02-1991
			TR 26150 A	15-02-1995
EP 0870437	A	14-10-1998	ZA 9004492 A	29-05-1991
			US 5878753 A	09-03-1999
			BR 9806628 A	20-03-2001
			CA 2231484 A1	11-09-1998
			EP 0870437 A2	14-10-1998
US 4077414	A	07-03-1978	JP 11046744 A	23-02-1999
			GB 1524211 A	06-09-1978
			AU 500814 B2	31-05-1979
			AU 8786375 A	30-06-1977
			BE 837440 A1	03-05-1976
			BR 7600035 A	03-08-1976

EPO FORM P0482

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 4017

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-10-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4077414 A		CA 1035230 A1	25-07-1978
		CH 604576 A5	15-09-1978
		DE 2559071 A1	15-07-1976
		DK 5576 A ,B,	10-07-1976
		FI 753635 A ,B,	10-07-1976
		JP 1176698 C	14-11-1983
		JP 51095197 A	20-08-1976
		JP 58005662 B	01-02-1983
		NL 7600147 A	13-07-1976
		ZA 7507980 A	29-12-1976
US 4615345 A	07-10-1986	AT 27717 T	15-06-1987
		AU 584307 B2	25-05-1989
		AU 3147884 A	14-02-1985
		BR 8403950 A	09-07-1985
		CA 1222675 A1	09-06-1987
		DE 3429260 A1	21-02-1985
		EP 0139934 A1	08-05-1985
		FI 843129 A ,B,	09-02-1985
		FR 2550422 A1	15-02-1985
		GB 2145919 A ,B	11-04-1985
		JP 2544717 B2	16-10-1996
		JP 60071798 A	23-04-1985
		MX 160969 A	28-06-1990
		PH 22543 A	17-10-1988
		IN 161765 A1	30-01-1988
		IN 167099 A1	01-09-1990
US 2013508 A	03-09-1935	NONE	

EPO FORM 90459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82